

**Technical Specification**

Design & Manufacture Standard: HG/T 20592

Flange Drilling: HG/T 20592 or ASME B 16.5


Face to face: HG/T 20592

Inspection: ASME B16.34

Perfect sealing performance, long using life

Easy maintenance


**PFA Lined Three Way Plug Valve**

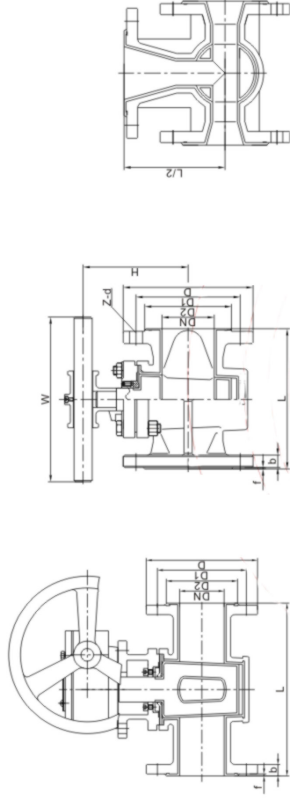

**HG/T 20592 PN10**

DN	L	D	D1	D2	Z-d	f	b	H	W	H0
25	160	115	85	65	4-14	2	14	98	260	-
32	180	140	100	78	4-18	3	16	101	260	-
40	200	150	110	85	4-18	3	16	128	320	-
50	230	165	125	100	4-18	3	16	128	320	-
65	290	185	145	120	4-18	3	18	135	320	-
80	310	200	160	135	8-18	3	20	164	400	322
100	350	220	180	155	8-18	3	20	178	400	332
125	400	250	210	185	8-18	3	22	205	-	385
150	480	285	240	210	8-23	3	24	220	-	405

◆ **Diagram 1**



◆ **Diagram 2**



◆ **Diagram 3**

